


# Extrusion coating line Hanyoung

## Gebrauchtmaschine | Artikel-Nr. 4538

### Technische Daten:

|             |                                 |
|-------------|---------------------------------|
| Maschine:   | Extrusion coating line Hanyoung |
| Hersteller: | Hanyoung                        |
| Typ:        | Extrusion coating line          |
| Größe:      | None                            |
| Kapazität:  | None                            |
| Jahr:       | None                            |

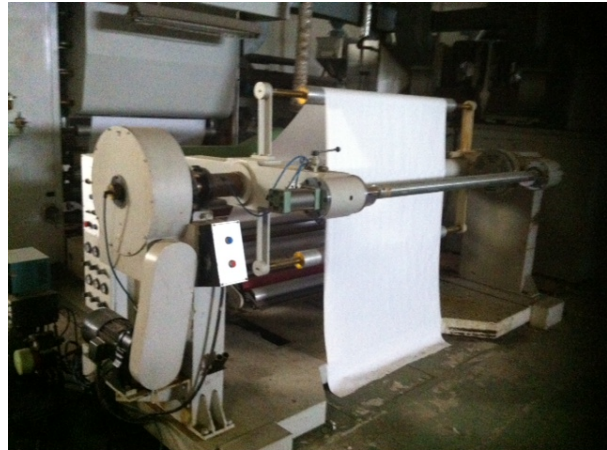

## Beschreibung:

---

Extrusion coating line with 2 separate extruders fully automatic operation

Automatic splicing for rewinder/unwinder 2 coronas

Material:

- Paper up to 150gsm,
- Film PP, PET, BOPP, PVC up to 250mic Coating material : All polymers

Speed: 250m/min

Used occasionally the last 7 years

MAJOR REFIT AND UPGRADE IN 2009 with DIGITAL EUROTHERM DRIVES

Excellent condition European electronics

The machine has produced :

PET + PE

PET + PE + ALU + PE PAPER + PE

PAPER + PE + ALU + PE

## Other details:

Web width max.: 1500mm Heating source for drying : Steam

- Unwinder.
  - Type: Double shaft
  - Automatic splicer
  - Diam. Max.: 1000mm
  - Core diam. : 76mm (3 inches) ,150mm (6 inches) with adaptors
  - Control tension type : Automatic
- Auxiliary unwinder
  - Type: Double
  - Diam. Max. :550mm
  - Core diam. :76mm (3 inches) ,150mm (6 inches) with adaptors
  - Control tension type :Automatic
- Extruders:
  - Screw diam :90
  - Output capacity (Kg/h) : 140Kg/h
- T- Die: 1500mm
  - Maker : HANYOUNG
  - Die opening : Yes
  - Die gap range : 5mic to 35mic